




AS240

802.11ax, 2x2 Dual-Band
Indoor Ceiling Access Point


Product Specification

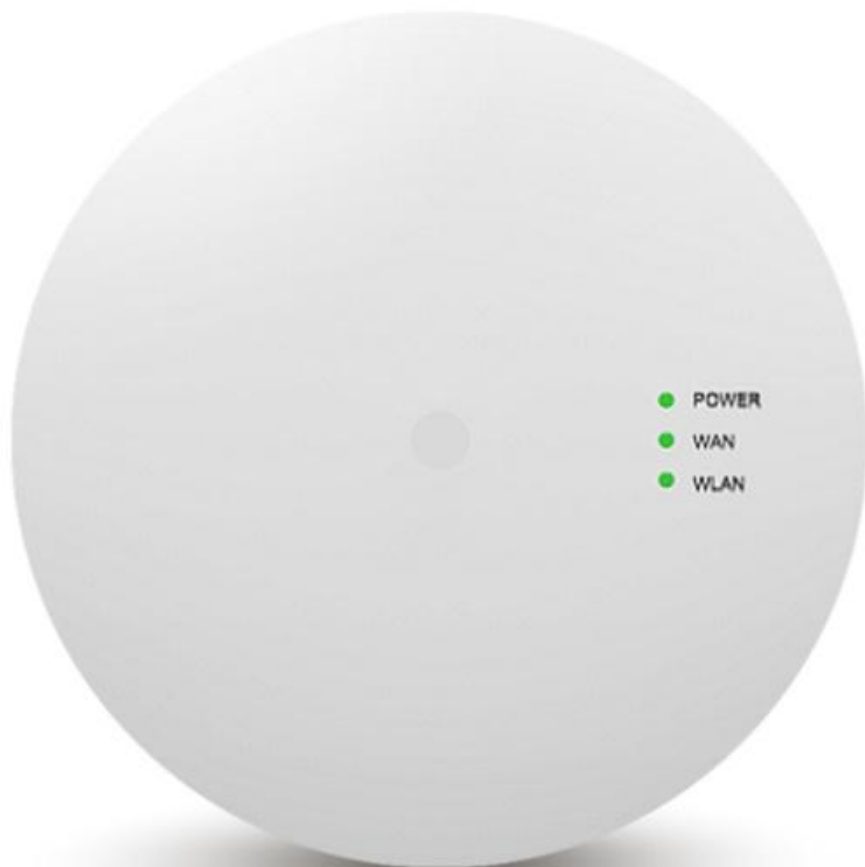



AS240

802.11ax, 2x2 Dual-Band
Indoor Ceiling Access Point

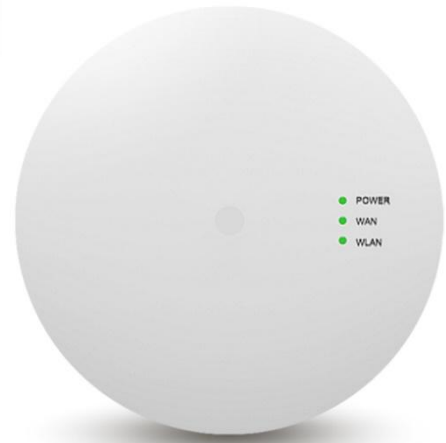

Description

Z-COM AS240 is mainstream and value Wi-Fi 6 indoor ceiling access point, which is ideal for retail, SOHO, clinic and other indoor applications.

It is affordable, small and easy to use, but at the same time comes with a very powerful Qualcomm Chipset, capable of all the advanced configurations and serve dual-band 5GHz and 2.4GHz radio at the same time.

Feature

- Dual-band Wi-Fi 6 (802.11ax), compatible with Wi-Fi 5 (802. 11ac)
- Supports up to 1,200 Mbps in 5GHz and 574 Mbps in 2.4GHz
- Max. EIRP up to 20dBm in 5GHz and 20dBm in 2.4GHz
- With 2 x RJ45 1G Ethernet Port
- Target wake time for power-saving of clients & IoT devices
- Uplink and downlink of MU-MIMO improves transmission to APs and client devices



AS240

802.11ax, 2x2 Dual-Band
Indoor Ceiling Access Point

Overview

Ultra-Fast Wi-Fi 6 Data Rate

Simultaneous 574 Mbps on 2.4 GHz and 1200 Mbps on 5 GHz totals 1774 Mbps Wi-Fi 6 speeds.

Flexible Power Options with 1Gbps PoE+ Ethernet

AS240 delivers exceptional performance to support the demand for better Wi-Fi with optimized wired performance, 1G Ethernet port. Compatibility with standard 802.3at PoE+ is ideal for flexible deployment.

Centralized Management Optional

AS240 are allowed to configure and manage multiple APs in a centralized choices include zMEC (container-based) or Wireless LAN Controller solutions. Through Z-COM WLC that includes remote monitor, troubleshooting, and efficiency-optimized and enjoys simple management, configuration and monitoring of all access points.

With zMEC, the platform for edge computing and PaaS, manages virtualized applications and import software by any x86 servers under different applications.

Advanced Enterprise Security, WPA3

This is another level of security over the older WPA2 technology. By using 192-bit encryption key, more secure encryption of passwords and enhanced protection against brute-force attacks combine to safeguard your Wi-Fi.

Easy and Flexible Installation

The AS240 provides the necessary parts for installation and features Plug-and-play and configuration free for ceiling installation.

Transmit Beamforming

AS240 with beamforming design (TxBF) to improve the signal strength and achieve higher range to a single client for RF reliability.

Multiple Applications

Allows to perform multiple functions, ideal for various scenarios like campus, restaurant, offices, clinic, and commercial space.



Specification

Wi-Fi		
Wireless Standards	IEEE 802.11 a/b/g/n/ac/ax	
Physical Data Rates Supported Rates	802.11ax : 4 to 1200 Mbps 802.11ac : 6.5 to 866 Mbps 802.11n : 6.5 to 300 Mbps 802.11a/g : 6 to 54 Mbps 802.11b : 1 to 11 Mbps	
Bandwidth Channelization	2.4GHz : 20/40 MHz 5GHz : 20/40/80 MHz	
MIMO	MU-MIMO	
Radio Chains and Streams	2.4GHz : 2x2:2 5GHz : 2x2:2	
Frequency Bands and Operating Channels	Taiwan	US
	2.412 – 2.462 GHz ; 11 channels 5.180 – 5.320 GHz ; 8 channels 5.500 – 5.720 GHz ; 12 channels 5.745 – 5.825 GHz ; 5 channels	2.412 – 2.462 GHz ; 11 channels 5.180 – 5.320 GHz ; 8 channels 5.500 – 5.720 GHz ; 12 channels 5.745 – 5.825 GHz ; 5 channels
	EU	China
	2.412 – 2.472 GHz ; 13 channels 5.180 – 5.320 GHz ; 8 channels 5.500 – 5.700 GHz ; 11 channels	2.412 – 2.472 GHz ; 13 channels 5.180 – 5.320 GHz ; 8 channels 5.745 – 5.825 GHz ; 5 channels
	Japan	India
	2.412 – 2.472 GHz ; 13 channels 5.180 – 5.320 GHz ; 8 channels 5.500 – 5.720 GHz ; 12 channels	2.412 – 2.472 GHz ; 13 channels 5.180 – 5.320 GHz ; 8 channels 5.500 – 5.720 GHz ; 12 channels 5.745 – 5.865 GHz ; 7 channels
*Operating Channel depends on configured regulatory domain.		

RF	
Antenna Type	Internal
Antenna Gain (max)	2.4GHz : 2dBi 5GHz : 2dBi
EIRP	2.4GHz : 20dBm 5GHz : 20dBm
Frequency Bands	ISM (2.4-2.484GHz) U-NII-1 (5.15-5.25GHz) U-NII-2A (5.25-5.35GHz) U-NII-2C (5.47-5.725GHz) U-NII-3 (5.725-5.85GHz)



PERFORMANCE AND CAPACITY

Peak PHY Rates	2.4 GHz : 574 Mbps 5 GHz : 1200 Mbps
Client Capacity	1024

PERFORMANCE TABLE

	2.4GHz TX TARGET POWER (PER CHAIN)		5GHz TX TARGET POWER (PER CHAIN)	
MU HE40	MCS0	15dBm±2dBm	MCS0	15dBm±2dBm
	MCS11	8dBm±2dBm	MCS11	8dBm±2dBm
MU VHT40	MCS9	10dBm±2dBm	MCS9	10dBm±2dBm
	2.4GHz RECEIVE SENSITIVITY		5GHz RECEIVE SENSITIVITY	
HE20	MS0	<-82dBm	MS0	<-82dBm
	MS11	<-52dBm	MS11	<-52dBm
HE40	MS0	<-79dBm	MS0	<-79dBm
	MS11	<-49dBm	MS11	<-49dBm
HE80			MS0	<-76dBm
			MS11	<-46dBm

INTERFACE

Ethernet	1x 10/100/1000Mbps WAN Port 1x 10/100/1000Mbps LAN Port	
Addition	1x Reset Button	
Power	Power Supply	Consumption
	WAN Port : PD Input (802.3at)	≤ 20W
Bluetooth	Version	Frequency
	5.0	2400 ~ 2480MHz
Environmental	Storage	Operating
	Temperature : -40~ 70 °C Humidity : 5 ~ 95%	Temperature : -15 ~ 45 °C Humidity : 5 ~ 95% (non-condensing)

STANDARDS

Compliance Standards	<p>IEC/EN 62368-1 EN55032 & EN55024 WEEE & RoHS IEEE standards : IEEE 802.11a/b/g/n/ac/ax IEEE 802.11d, e, h, i, j, k, r, u, v time stamp, w, and z standards Multimedia : Wi-Fi multimedia (WMM) Security : Open System 802.1x WPA-PSK/WPA-Enterprise WPA3-PSK Extensible Authentication Protocol (EAP) types : EAP-Transport Layer Security (TLS) EAP-Tunneled TLS (TTLS) Protected EAP (PEAP) EAP-Subscriber Identity Module (SIM) *Above partial functions should be configured by Z-COM Wireless LAN Controllers (WLC)</p>
----------------------	---

MECHANICAL

Mounting Method	Ceiling
Dimension	Ø175 mm × 39.1 mm
Anti-static Grade	IEC61000-4-2(Criteria B) Air : ±8kV Contact : ±4kV
Green	RoHS compliant
LED Definition	<ul style="list-style-type: none"> ● PWR/SYS : Green Green Off : power / system off Green On : power / system on ● WLAN : Green Off : No WLAN connection detected Green On : WLAN connection detected Green Blinking : Sending / receiving data ● WAN : Green Off : No Ethernet connection detected Green On : Ethernet connection detected Green Blinking : Sending / receiving data
Supported WLC or container-base	- WS5G2 / WS7G2 / WS10G2 / WS200G2 / WS500G2 / WS1000G2 - zMEC
Warranty	1 year

